


TEFLON[®] LINED
SPHERICAL BEARINGS • • • SELF LUBRICATING

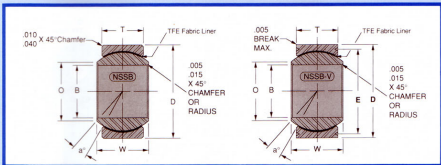

PART NUMBER	DIMENSIONS IN INCHES								Static Radial Limit Load Lbs.	Static Axial Limit Load Lbs.	Dynamic Oscillating Radial Load Lbs.	Approx. Brg. Wt. Lbs.	
	B + .0000 - .0005	D + .0000 - .0005	W + .000 - .002	T ± .005	E + .000 - .010	O Dia. REF.	Ball Dia. Ref.	a° MIN.					
NSSB3	NSSB3V	1900	5625	281	218	502	293	406	10	3,975	150	1,500	.020
NSSB4	NSSB4V	2500	6562	343	250	596	364	500	10	6,040	430	2,320	.020
NSSB5	NSSB5V	3125	7500	375	281	652	419	562	10	8,750	700	3,430	.030
NSSB6	NSSB6V	3750	8125	406	312	714	515	656	9	10,540	1,100	4,200	.040
NSSB7	NSSB7V	4375	9062	437	343	808	570	718	8	13,200	1,400	5,700	.050
NSSB8	NSSB8V	5000	10000	500	390	878	641	813	8	17,900	2,100	7,900	.070
NSSB9	NSSB9V	5625	10937	562	437	972	711	906	8	23,200	3,680	10,300	.090
NSSB10	NSSB10V	6250	11875	625	500	1,065	739	968	8	30,500	4,720	13,400	.120
NSSB12	NSSB12V	7500	14375	750	593	1,315	920	1,187	8	46,400	6,750	19,700	.210
NSSB14	NSSB14V	8750	15625	875	703	1,440	978	1,312	8	62,200	9,350	26,100	.270
NSSB16	NSSB16V	10000	17500	1000	797	1,628	1,118	1,500	9	82,200	12,160	34,100	.390

MATERIALS

BALL	RACE	LINER
440 C CRES R/C 65-62	410 CRES R/C 23-35	TEFLON [®] FABRIC PERMANENTLY BONDED TO RACE I.D.