


2 PIECE, STAINLESS STEEL, TEFLON* LINED
FEMALE ROD ENDS ••• SELF LUBRICATING

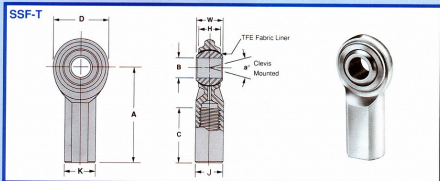

PART NO.		DIMENSIONS IN INCHES											Radial Static Load Cap. Lbs.	Approx. Brg. Wt. Lbs.
Right Hand	Left Hand	B + .0015 - .0005	W + .000 - .005	H Ref.	A ± .015	D ± .010	K ± .010	J ± .010	Ball Dia. Ref.	C + .062 - .031	Thread UNF-2B	a° Misalign. Angle		
SSF3T	SSFL3T	.1900	.312	.234	1.062	.625	.406	.312	.437	.500	10-32	17	900	.04
SSF4T	SSFL4T	.2500	.375	.250	1.312	.750	.469	.375	.500	.687	1/4-28	21	1,350	.05
SSF5T	SSFL5T	.3125	.437	.312	1.375	.875	.500	.437	.625	.687	5/16-24	17	2,000	.08
SSF6T	SSFL6T	.3750	.500	.399	1.625	1.000	.687	.562	.719	.812	3/8-24	19	3,000	.13
SSF7T	SSFL7T	.4375	.562	.406	1.812	1.125	.750	.625	.812	.937	7/16-20	18	3,750	.18
SSF8T	SSFL8T	.5000	.625	.453	2.125	1.312	.875	.750	.937	1.062	1/2-20	17	4,650	.29
SSF10T	SSFL10T	.6250	.750	.484	2.500	1.500	1.000	.875	1.125	1.375	5/8-18	22	5,850	.43
SSF12T	SSFL12T	.7500	.875	.593	2.875	1.750	1.125	1.000	1.312	1.562	3/4-16	18	7,500	.65

PART NO.		DIMENSIONS IN MILLIMETERS											Radial Static Load Cap. Kilograms	Approx. Brg. Wt. Grams
Right Hand	Left Hand	B + .0635 - .0127	W + .000 - .127	H Ref.	A ± .381	D ± .254	K ± .254	J ± .254	Ball Dia. Ref.	C + 1.574 - .767	Thread UNF-2B	a° Misalign. Angle		
SSF3T	SSFL3T	4.83	7.92	5.94	26.97	15.88	10.31	7.92	11.10	12.70	10-32	17	408	18
SSF4T	SSFL4T	6.35	9.53	6.35	33.32	19.05	11.91	9.53	12.70	17.45	1/4-28	21	612	23
SSF5T	SSFL5T	7.94	11.10	7.92	34.93	22.23	12.70	11.10	15.88	17.45	5/16-24	17	907	36
SSF6T	SSFL6T	9.53	12.70	9.12	41.28	25.40	17.45	14.27	18.26	20.62	3/8-24	19	1361	59
SSF7T	SSFL7T	11.11	14.27	10.31	46.02	25.58	19.05	15.88	20.62	23.80	7/16-20	18	1701	82
SSF8T	SSFL8T	12.70	15.88	11.50	53.98	33.32	22.23	19.05	23.80	26.97	1/2-20	17	2109	132
SSF10T	SSFL10T	15.88	19.05	12.29	63.50	38.10	25.40	22.23	28.58	34.93	5/8-18	22	2654	195
SSF12T	SSFL12T	19.05	22.23	15.06	73.03	44.45	28.58	25.40	33.32	39.67	3/4-16	18	3402	295

MATERIALS

BALL	LINER	BODY
440 C STAINLESS STEEL HEAT TREATED	TEFLON* FABRIC PERMANENTLY BONDED TO RACE I.O.	TYPE 303 STAINLESS STEEL