


# SSH-F-T SERIES

# HIJ

3 PIECE, TEFLON® LINED, HEAVY DUTY  
FEMALE ROD END ••• SELF LUBRICATING

## SSH-F-T

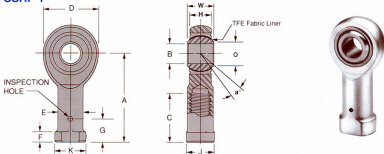

PART NO.		DIMENSIONS IN INCHES													Radial Static Load Cap. Lbs.	Approx. Brg. Wt. Lbs.		
Right Hand	Left Hand	B	W	H	A	D	O	E	K	J	F	Ball Dia. Ref.	C	G			Thread UNF 3B	α° Misalign. Angle
SSH4T	SSH4L4T	2.500 +0.000 -0.005	.437 +0.000 -0.002	.337 ±.005	1.469 ±.010	.806 ±.010	.375 REF.	.485 ±.010	.562 REF.	.500 +0.002 -0.010	.188 -0.010 -0.062	.531 REF.	.750 MIN	.375 DIM	5/16-24	5	7,550	.084
SSH5T	SSH5L5T	3.125	.437	.327	1.625	.900	.401	.547	.625	.562	.250	.593	.875	.437	3/8-24	14	9,200	102
SSH6T	SSH6L6T	3.750	.500	.416	1.812	1.025	.471	.610	.687	.625	.250	.687	1.000	.500	7/16-20	9	10,900	160
SSH7T	SSH7L7T	4.375	.562	.452	2.000	1.150	.542	.735	.875	.750	.250	.781	1.125	.562	1/2-20	10	14,050	230
SSH8T	SSH8L8T	5.000	.625	.515	2.250	1.337	.612	.860	1.000	.875	.250	.875	1.250	.687	5/8-18	9	23,400	340
SSH10T	SSH10L10T	6.250	.750	.577	2.500	1.525	.752	.985	1.125	1.000	.375	1.062	1.375	.812	3/4-16	12	26,050	490
SSH12T	SSH12L12T	7.500	.875	.640	2.875	1.775	.892	1.110	1.250	1.125	.375	1.250	1.625	.937	7/8-14	13	34,500	740

PART NO.		DIMENSIONS IN MILLIMETERS													Radial Static Load Cap. Kilograms	Approx. Brg. Wt. Grams		
Right Hand	Left Hand	B	W	H	A	D	O	E	K	J	F	Ball Dia. Ref.	C	G			Thread UNF 3B	α° Misalign. Angle
SSH4T	SSH4L4T	6.35 +0.000 -0.127	11.10 +0.000 -0.051	8.56 ±.127	37.31 ±.254	20.47 ±.254	9.53 REF.	12.32 ±.254	14.27 REF.	12.70 +0.051 -0.254	4.78 -0.254 -1.575	13.49 REF.	19.05 MIN	9.53 DIM	5/16-24	5	3,425	38
SSH5T	SSH5L5T	7.94	11.10	8.31	41.28	22.86	10.19	13.89	15.88	14.27	6.35	15.06	22.23	11.10	3/8-24	14	4,173	46
SSH6T	SSH6L6T	9.53	12.70	10.57	46.02	26.04	11.96	15.49	17.45	15.88	6.35	17.45	25.40	11.10	7/16-20	9	4,944	73
SSH7T	SSH7L7T	11.11	14.27	11.48	50.80	29.21	13.77	18.67	22.23	19.05	6.35	19.84	28.58	12.70	1/2-20	10	6,373	104
SSH8T	SSH8L8T	12.70	15.88	13.08	57.15	33.96	15.54	21.84	25.40	22.23	6.35	22.23	31.75	14.27	5/8-18	9	10,614	154
SSH10T	SSH10L10T	15.88	19.05	14.66	63.50	38.74	19.10	25.02	28.58	25.40	9.53	26.97	34.93	17.45	3/4-16	12	11,816	222
SSH12T	SSH12L12T	19.05	22.23	16.26	73.03	45.09	22.66	28.19	31.75	28.58	9.53	31.75	41.28	20.62	7/8-14	13	15,649	336

## MATERIALS

BALL	RACE	LINER	BODY
440 C CRS R/C 55-62	410 CRS R/C 29-36	TEFLON® FABRIC PERMANENTLY BONDED TO RACE I.D.	17-4 PH CRS HEAT TREATED MAGNIFLUXED