


3 PIECE, TEFLON* LINED, HEAVY DUTY
MALE ROD END ••• SELF LUBRICATING

SSHM-T

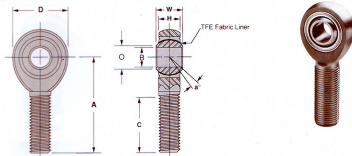

PART NO.		DIMENSIONS IN INCHES										Radial Static Load Cap. Lbs.	Approx. Brg. Wt. Lbs.
Right Hand	Left Hand	B + .0003 -.0005	W + .000 -.002	H ± .005	O REF.	A ± .010	D ± .010	Ball Dia. Ref.	C ± .031	Thread UNF 3A	g° Malign. Angle		
SSHMT	SSHML4T	.2500	.375	.337	.375	1.562	.806	.531	.968	5/16-24	5	7.550	.067
SSHMT	SSHML5T	.3125	.437	.327	.401	1.875	.950	.593	1.187	3/8-24	14	9.200	.095
SSHMT	SSHML6T	.3750	.500	.416	.471	1.938	1.025	.687	1.187	7/16-20	9	10.900	.140
SSHMT	SSHML7T	.4375	.562	.452	.542	2.125	1.150	.781	1.281	1/2-20	10	14.050	.210
SSHMT	SSHML8T	.5000	.625	.515	.612	2.438	1.337	.875	1.468	5/8-18	9	23.400	.330
SSHMT	SSHML10T	.6250	.750	.577	.752	2.625	1.525	1.062	1.562	3/4-16	12	26.050	.480
SSHMT	SSHML12T	.7500	.875	.640	.892	2.875	1.775	1.250	1.687	7/8-14	13	34.500	.730

PART NO.		DIMENSIONS IN MILLIMETERS										Radial Static Load Cap. Kilograms	Approx. Brg. Wt. Grams
Right Hand	Left Hand	B + .0003 -.0127	W + .000 -.051	H ± .127	O REF.	A ± .254	D ± .254	Ball Dia. Ref.	C ± .787	Thread UNF 3A	g° Malign. Angle		
SSHMT	SSHML4T	6.35	11.10	8.56	7.62	39.67	20.47	13.49	24.59	5/16-24	5	3.425	30
SSHMT	SSHML5T	7.94	11.10	8.31	9.14	47.63	22.86	15.06	30.15	3/8-24	14	4.173	43
SSHMT	SSHML6T	9.53	12.70	10.57	11.94	49.23	26.04	17.45	30.15	7/16-20	9	4.944	64
SSHMT	SSHML7T	11.11	14.27	11.48	13.72	53.96	29.21	19.84	32.54	1/2-20	10	6.373	95
SSHMT	SSHML8T	12.70	15.88	13.08	15.49	61.93	33.96	22.23	37.29	5/8-18	9	10.614	150
SSHMT	SSHML10T	15.88	19.05	14.66	19.05	66.68	38.74	26.97	39.67	3/4-16	12	11.816	218
SSHMT	SSHML12T	19.05	22.23	16.26	21.59	73.03	45.09	31.75	42.85	7/8-14	13	15.649	331

MATERIALS

BALL	RACE	LINER	BODY
440 C CRS R/C 55-62	410 CRS R/C 23-35	TEFLON* FABRIC PERMANENTLY BONDED TO RACE I.D.	17-4 PH CRCS HEAT TREATED MAGNIFLUXED